

PRODUCT DATA SHEET



Air 5121

Art no: HV-A-5121



NXG



Art no:	HV-A-5121
Size:	6-12
Material:	Polyester/Spandex, Nitrile
Packaging:	12/120
Standard:	EN ISO 21420:2020, EN388:2016
Category:	II



CAT: II



EN388



4121X



Properties

Seamless knitted glove made from hi-vis orange polyester/spandex, providing high visibility and a flexible fit. The palm is coated with black foamed nitrile for excellent grip in dry and slightly oily environments. Patterned nitrile reinforcement in the palm increases durability and improves grip in high-wear areas. The elastic knit ensures a snug and flexible fit, reducing hand fatigue and offering good fingertip sensitivity. Ideal for general handling, light maintenance, DIY tasks, and logistics where control and comfort are essential.

Material information


The glove is knitted with a 15 Gauge machine which means 15 stitches per inch. The thread is in polyester/spandex and coated in foamed nitrile in the palm and over the fingers. Grip pattern in nitrile.

How to read the pictogram:

Technical facts: Intermediate design (category II)

EN388:2016

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

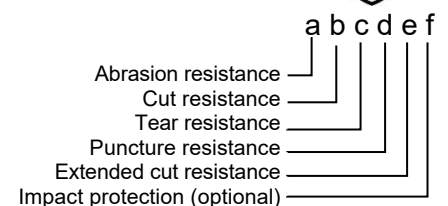

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se