

# PRODUCT DATA SHEET



## Cut Pro 5133


Art no: HV-C-5133



**NXG**



Art no:	HV-C-5133
Size:	6-12
Material:	Nylon/NXG UCT™/Spandex, Microfoamed Nitrile
Packaging:	12/120
Standard:	EN ISO 21420:2020, EN388:2016
Category:	II

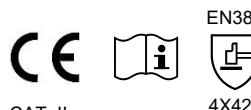

## Properties

Seamless knitted cut protection glove with cut level D for reliable protection in demanding tasks and good fingertip sensitivity for precision work. The palm is coated with micro-foamed nitrile and features reinforced thumb grip for excellent grip and some oil resistance. The glove combines durability with exceptional flexibility and a tight fit that ensures high comfort throughout the day. Touch-screen compatible for convenient use of touchscreens without removing the glove.

## Material information


The glove is knitted with a 15 Gauge machine which means 15 stitches per inch. The thread is in Nylon/NXG UCT™/Spandex and coated in microfoamed nitrile in the palm and over the fingers.

How to read the pictogram:

## Technical facts: Intermediate design (category II)

EN388:2016

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

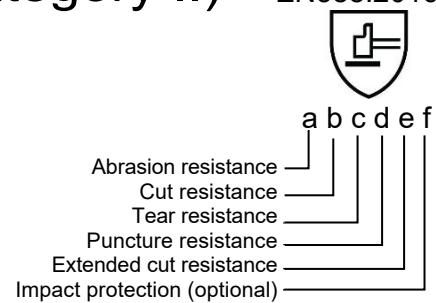

Soft Touch AB

Postal address Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: [info@softtouch.se](mailto:info@softtouch.se) Website: [www.softtouch.se](http://www.softtouch.se)