PRODUCT DATA SHEET

Zeus

Art no: G-8070

Art no:	G-8070
Size:	8-12
Material:	Goat grain, goat suede, cow split, Kevlar®
Packaging:	12/60
Standard:	EN ISO 21420:2020, EN388:2019, EN407:2020
Category:	II

CATEGORY: II

EN388 2222X

EN407 412X4X

Properties

Heat resistant gloves fully made in specially treated leather making the gloves both water and oil repellent. LWG certified goat suede leather in the palm with full index finger reinforcement. The upper hand in LWG certified goat grain leather. 8 cm long cuff in heat resistant cow split leather for added protection. Durable double stitching with heat resistant Kevlar® thread in all areas exposed to wear and tear. An elastic seam in the wrist provides a safer fit. Fully lined with a 180 grams brushed Kevlar® lining. The brushed lining increases comfort but also has insulating properties. This means that the glove can be used outdoor in colder weather without using an extra glove as a liner.

Material information

The gloves are sewn in goat grain, goat suede and cow split leather. 180gsm brushed Kevlar® liner. All seams in Kevlar® thread.

Technical facts: Intermediate design (category II)

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resist- ance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

How to read the pictogram:

EN388:2016

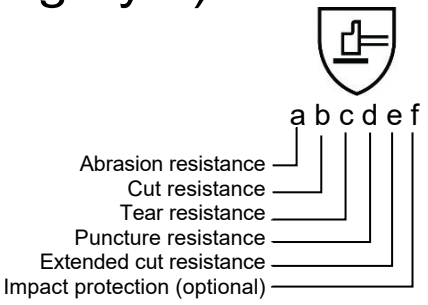

Soft Touch AB
Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden
Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se