

Fireman Glove Flame

Art no: HGS-7992



HySafety



Art no:	HGS-7992
Size:	8-11
Materials:	Cow hide leather, Kevlar
Packaging:	1/12
Standard:	EN420, EN388:2016, EN659
Category:	III



CATEGORY: III



EN388:2016



3244X

EN659



A1/AC



Kevlar.

Properties

Heat resistant protective gloves for fire and rescue services and industries with requirements for heat and fire protection. Sewn in specially treated, flame retardant and thick cowhide for the entire glove. Extra reinforcements for the thumb and welted seams for increased durability. Liner with insulating Kevlar®. Triple elastic seams for the wrist. Snug knitted cuff in double layered Kevlar® with a sturdy pull tab. All seams in durable and heat resistant Kevlar®.

Material information

The gloves are sewn in flame retardant cow grain leather with Kevlar®thread. Kevlar®liner. Cuff in knitted Kevlar®.


How to read the pictogram:

Technical facts: Intermediate design (category II)

EN388:2016



a b c d e f

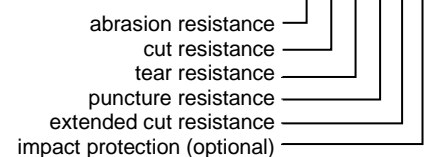

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.