

PRODUCT DATA SHEET



Sofcut D

Art no: HV-NXC3232



| | |
|------------|---|
| Art no: | HV-NXC3232 |
| Size: | 6/XS-12/3XL |
| Materials: | HPPE/Steel, Polyester/Spandex, Super Grip®, Nitrile |
| Packaging: | 12/120 |
| Standard: | EN ISO 21420:2020, EN388:2016 |
| Category: | II |



CATEGORY: II



EN388:2016



4X42D



Properties

Knitted black cut-resistant glove (Level D) in polyester/spandex and HPPE reinforced with steel. The glove is very flexible with a great fit and exceptional tactile sensitivity. Black foamed nitrile coating with a Sandy Grip surface for an extra firm grip and great oil-resistance. Butadiene free. The ergonomic design of the glove give advantages such as comfort and less hand fatigue.

Material information

Knitted in 13 gauge HPPE/Steel (cut-resistance level D), polyester/spandex with Super Grip® nitrile foam coating.

Technical facts: Intermediate design (category II)


For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

How to read the pictogram:

EN388:2016



a b c d e f

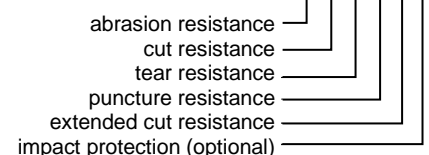

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se