

PRODUCT DATA SHEET



JokaPolar

Art no: JKS-POLAR



| | |
|------------|---|
| Art no: | JKS-POLAR |
| Size: | 10/XL-12/3XL |
| Materials: | Biovinyl |
| Packaging: | 10/60 |
| Standard: | EN 420:2003, EN 388:2016, EN 511:2006, EN ISO 374-1:2016, EN ISO 374-5:2016 |
| Category: | III |



CATEGORY: III



EN420



EN388:2016



EN511



EN374-1
TYPE A



EN374-5

3121X

320

KLMPST

Properties

Jokasafe JokaPolar is a warm and durable vinyl coated glove for cold environments where firm grip and precision is a must. The glove has a detachable washable liner made from synthetic fur.

A durable triple vinyl 360° coating remain flexible even at -50°C. The granulated TopGrip®-surface offers a firm grip in dry, wet or oily environments.

The vinyl in this glove is made from fossil free BIOVYN™-vinyl. Renewable BIOVYN™ reduce the carbon dioxide footprint up to 74% compared to vinyl made from traditional fossil fuels. Biovinyl products have the exact same properties as conventional fossil vinyl products making them very durable with an excellent protection against chemicals and mechanical abrasion as well as extreme weather conditions.

Material information

Fossil free vinyl (BIOVYN™), cotton, polyester

Technical facts: Intermediate design (category II)


For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

How to read the pictogram:

EN388:2016



a b c d e f

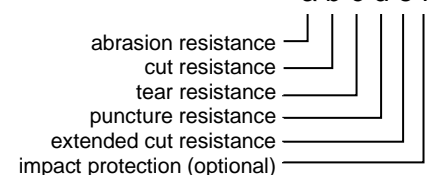

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se