

# PRODUCT DATA SHEET



## Cut Pro 5136

Art no: HV-C-5136



Art no:	HV-C-5136
Size:	6-11
Material:	Polyester/NXG UCT™/Spandex, Foamed Nitrile
Packaging:	12/120
Standard:	EN ISO 21420:2020, EN388:2016, EN407:2020
Category:	II



CAT: II



EN388



4X42D

EN407



X1XXXX



STANDARD 100



## Properties

Seamless knitted cut protection glove with cut level D for reliable protection in demanding work environments. Dual-layer nitrile coating – the first layer covers the entire hand for waterproof protection, while the second layer of foamed nitrile provides excellent grip and oil resistance. Reinforced thumb crotch offers extra durability in one of the glove's most exposed areas. The glove features a tight and flexible fit for high comfort and mobility throughout a full day of work. Touchscreen compatible for convenient use of touchscreens without removing the glove.

## Material information

The glove is knitted with a 15 Gauge machine which means 15 stitches per inch. The thread is in Polyester/NXG UCT™/Spandex and coated in foamed nitrile in the palm and over the fingers.

How to read the pictogram:


## Technical facts: Intermediate design (category II)

EN388:2016

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.



a b c d e f

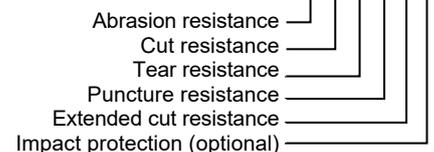

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se