

PRODUCT DATA SHEET




Cut 3140

Art no: HV-C-3140



Art no:	HV-C-3140
Size:	6-12
Material:	HPPE/Steel/Polyester/Spandex, foamed Nitrile
Packaging:	12/120
Standard:	EN ISO 21420:2020, EN388:2016
Category:	II

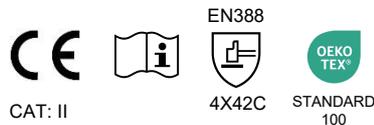

Properties

Knitted orange cut-resistant glove (Level C) in polyester/spandex and HPPE reinforced with steel. The glove is very flexible with a great fit and exceptional tactile sensitivity. Black foamed nitrile coating for a firm grip and great oil-resistance. Touch screen compatible so you can use your phone without removing the gloves. Thumb crotch reinforcement. Butadiene free. The ergonomic design of the glove give advantages such as comfort and less hand fatigue.

Material information


The glove is knitted with a 13 Gauge machine which means 13 stitches per inch. The thread is in HPPE/Steel/Polyester/Spandex and coated in microfoamed nitrile in the palm and over the fingers.

How to read the pictogram:

Technical facts: Intermediate design (category II)

EN388:2016

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

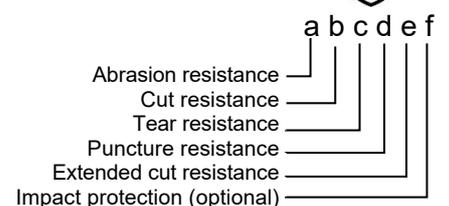

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se