

PRODUCT DATA SHEET



Cut Pro 8138

Art no: HV-C-8138



Art no:	HV-C-8138
Size:	6-12
Material:	Polyester/NXG UCT™/Spandex, PU
Packaging:	12/120
Standard:	EN ISO 21420:2020, EN388:2016
Category:	II



CAT: II



EN388



3X41C



STANDARD 100



Properties

Knitted precision glove with cut-resistance (Level C) in nylon/spandex and NXG UCT™. The glove is extremely thin and flexible with a great fit and exceptional tactile sensitivity. Black PU coating for a very good and firm grip. Reinforced thumb crotch improves durability in high-wear areas. Touch screen compatible so you can use your phone without removing the gloves. Butadiene free. The ergonomic design of the glove give advantages such as comfort and less hand fatigue.

Material information

The glove is knitted with a 18 Gauge machine which means 18 stitches per inch. The thread is in Polyester/UHMWPE/Spandex and coated in PU in the palm and over the fingers.

How to read the pictogram:


Technical facts: Intermediate design (category II)

EN388:2016

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.



a b c d e f

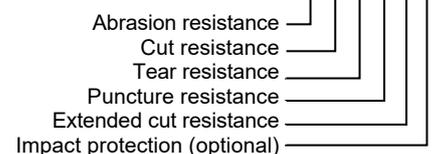

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se