

PRODUCT DATA SHEET



Joka Xo +35

Art no: JKS-XO35



Art no:	JKS-XO35
Size:	7-11
Material:	BIOVYN™ vinyl, cotton, polyester
Packaging:	10/60
Standard:	EN 420:2003+A1:2009, EN ISO 374-1:2016 Type A, EN 374-2:2014, EN ISO 374-5:2016, EN 16523-1:2015, EN 388:2016, EN 511:2006, EN ISO 4675:2017, EN ISO 7854:1997 Method A, EN ISO 2286-3:1998.
Category:	III



CAT: III

EN374-1	EN374-5	EN388	EN511
KLMPST		2121X	101



Properties

Joka Xo +35 is a durable vinyl coated glove with a 35 cm long vinyl coated sleeve. A durable triple vinyl 360° coating remain flexible even at -50°C. The smooth TopGrip®-surface offers a firm grip in dry, wet or oily environments. Liner in 100% cotton. The sleeve is made from polyester- or nylon and coated in PVC which offers effective arm protection. Testresults for this product is only valid for the glove part not the sleeve.

The vinyl in this glove is made from fossil free BIOVYN™-vinyl. Renewable BIOVYN™ reduce the carbon dioxide footprint up to 74% compared to vinyl made from traditional fossil fuels. Biovinyl products have the exact same properties as conventional fossil vinyl products making them very durable with an excellent protection against chemicals and mechanical abrasion as well as extreme weather conditions.

Material information

The gloves are made of vinyl, with liner made from 100% cotton. The protective sleeve is made of polyester or nylon with a vinyl coating.

How to read the pictogram:


Technical facts: Intermediate design (category II)

EN388:2016

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resistance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.



a b c d e f

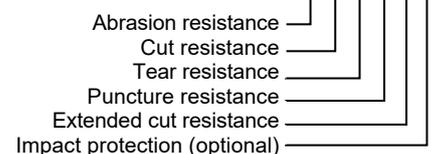

Soft Touch AB

Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden

Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se