PRODUCT DATA SHEET

Tuffel Dura 5130

Art no: HV-D-5130



Art no:	HV-D-5130
Size:	6-12
Material:	Nylon/Spandex, Nitrile
Packaging:	12/120
Standard:	EN ISO 21420:2020, EN388:2016, EN407:2020, OEKO-TEX Standard 100
Category:	II

CAT: II

EN388 4131A

EN407 X1XXXX

OEKO TEX® STANDARD 100

Properties

Thin and seamless nylon/spandex liner glove with Tuffel™ palm coating, engineered for superior abrasion resistance and long-lasting durability. Offers excellent grip performance in dry and wet conditions while maintaining flexibility for all-day comfort. High-visibility orange cuff enhances safety awareness on the jobsite. Ideal for general handling and extended wear in demanding environments

Material information


Knitted glove in 15g nylon/spandex with a high density nitrile coating in the inner hand.

Technical facts: Intermediate design (category II)

For areas of specific risks, i.e. mechanical risks. These products will have been CE type tested against European EN388:2016 test methods and certified by a notified body. The testing is done for abrasion resistance, cut resistance, tear resistance, puncture resistance, extended cut resistance and impact protection. The maximum score for each level are; abrasion 4, cut resistance 5, tear resist- ance 4, puncture resistance 4, extended cut resistance F (X if not applicable) and impact protection (optional test) P if approved. Evaluate the importance of each of the properties and how it applies to you as a user.

How to read the pictogram:

EN388:2016

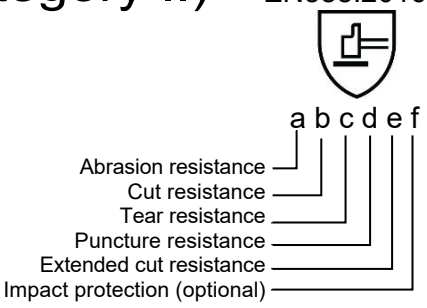

Soft Touch AB
Postal adress Gamla Alingsåsvägen 24, 433 38 Partille, Sweden
Phone: +46 (0)31-548050 Fax: +46 (0)31-531005 Email: info@softtouch.se Website: www.softtouch.se